



Small diameter carbide drills with oil holes

# ADO-MICRO

Volume 3

## NOWA PROMOCJA

Wybierz dowolne 3 wiertła  
serii ADO-MICRO a najtańsze z nich  
otrzymasz za 1 Euro

Czas trwania promocji do końca maja 2024  
O szczegóły zapytaj naszego pracownika



# KEY FEATURES: ADO-MICRO

---



1 Double margin


2 Coolant through

3 IchAda coating  
Excellent surface smoothness

4 Large size range  
2D/5D: Ø0,7~ Ø2  
12D/20D/30D: Ø1~ Ø2  
71 items total




# "STABLE" AND "HIGH EFFICIENCY" SMALL DIAMETER DEEP-HOLE DRILLING

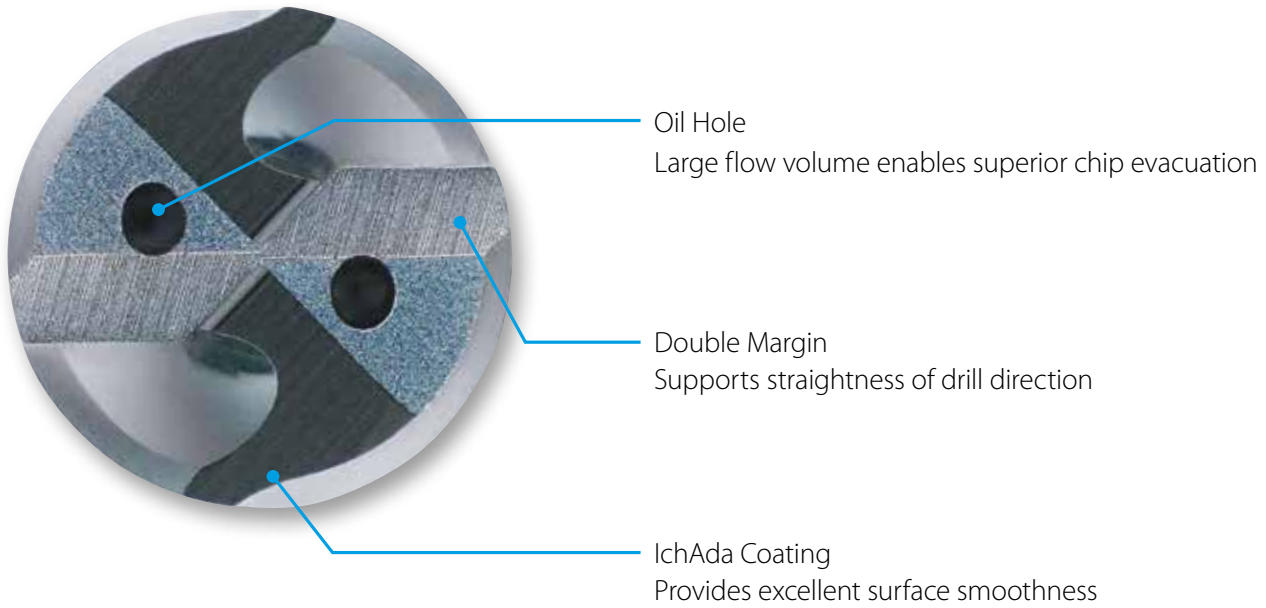

## Features that enable outstanding chip evacuation performance


### Flute structure

Stable performance even in difficult small diameter deep-hole applications

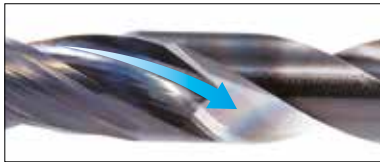

#### Extended Flute

Chips are discharged from the tip of the flute to the extended flute with enhanced evacuation capability

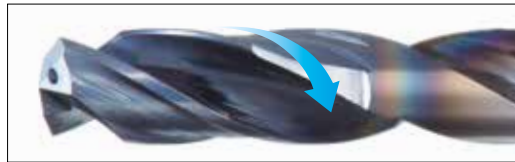



#### Removed End of Margin

Capability to smoothly discharge "micro sludges" that can be easily accumulated around the outer periphery of the tool, which is a key cause of abrupt tool breakage.

### Oil Holes



Greater coolant flow volume achieved by the hollow shank design to enable smooth chip evacuation

Tool	ADO-MICRO 12D Ø 1,5	Competitor Ø 1,5
Hollow Shank	Hollow	Solid
Coolant	Water Soluble (Internal)	
Coolant pressure	1,5 Mpa	
Time of Lubricant supply	60 sec.	

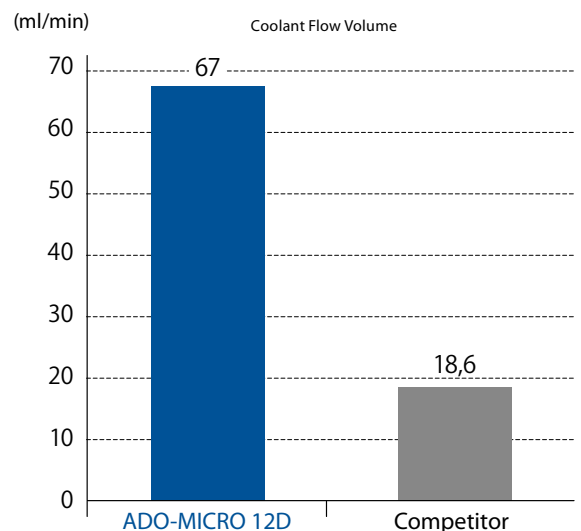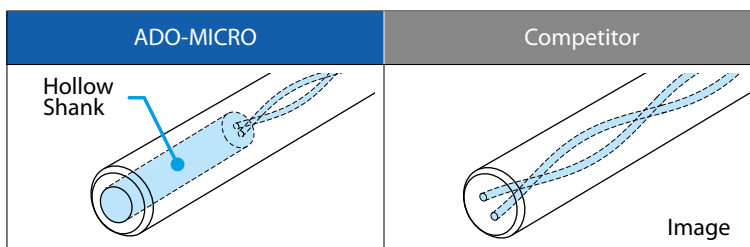

# ADO-MICRO-2D NEW

Drilling | Solid carbide | Micro drills



- First choice in quality and performance
- Micro carbide drill with internal coolant, IchAda coating
- Double margin, up to 2xD
- For general purpose steels and cast iron
- 17 sizes

<b>P</b>	<b>P</b>	<b>P</b>	<b>P</b>	<b>M</b>	<b>K</b>	<b>K</b>	<b>N</b>	<b>S</b>	<b>H</b>	<b>H</b>	<b>H</b>
C < 0,2%	0,25 < C < 0,4	C ≥ 0,45%	SCM	INOX	GG	GGG	AC, ADC	Ti	25-35 HRC	35-45 HRC	45-52 HRC

<b>A</b>	<b>CARBIDE</b>	<b>IchAda</b>	<b>±30°</b>	<b>+0.001~+0.010</b>	<b>SHRINK FIT</b>		<b>140°</b>
----------	----------------	---------------	-------------	----------------------	-----------------------	--	-------------

Drilling | Solid carbide

Micro drills



EDP	DC	LU	LCF	OAL	DCON	LS	PL
8732001	0,7	1,4	4,2	47	3	38,5	0,1
8732002	0,75	1,5	4,5	47	3	38,3	0,1
8732003	0,8	1,6	4,8	50	3	41,1	0,1
8732004	0,85	1,7	5,1	50	3	40,9	0,2
8732005	0,9	1,8	5,4	50	3	40,7	0,2
8732006	0,95	1,9	5,7	50	3	40,5	0,2
8732007	1	2	6	53	3	42,8	0,2
8732008	1,1	2,2	6,6	53	3	42,4	0,2
8732009	1,2	2,4	7,2	53	3	41,9	0,2
8732010	1,3	2,6	7,8	53	3	41,5	0,2
8732011	1,4	2,8	8,4	53	3	41,1	0,3
8732012	1,5	3	9	53	3	40,7	0,3
8732013	1,6	3,2	9,6	53	3	40,3	0,3
8732014	1,7	3,4	10,2	53	3	39,9	0,3
8732015	1,8	3,6	10,8	53	3	39,5	0,3
8732016	1,9	3,8	11,4	53	3	39	0,3
8732017	2	4	12	58	3	43,6	0,4

EDP	DC	LU	LCF	OAL	DCON	LS	PL



# ADO-MICRO-12D NEW

Drilling | Solid carbide | Micro drills



- First choice in quality and performance
- Micro carbide drill with internal coolant, IchAda coating
- Double margin, up to 12xD
- For general purpose steels and cast iron
- 11 sizes



EDP	DC	LU	LCF	OAL	DCON	LS	PL
8732035	1	12	17	60	3	38,8	0,2
8732036	1,1	13,2	18,7	65	3	42,3	0,2
8732037	1,2	14,4	20,4	65	3	40,7	0,2
8732038	1,3	15,6	22,1	65	3	39,2	0,3
8732039	1,4	16,8	23,8	70	3	42,7	0,3
8732040	1,5	18	25,5	70	3	41,2	0,3
8732041	1,6	19,2	27,2	70	3	39,7	0,3
8732042	1,7	20,4	28,9	73	3	41,2	0,4
8732043	1,8	21,6	30,6	73	3	39,7	0,4
8732044	1,9	22,8	32,3	73	3	38,1	0,4
8732045	2	24	34	77	3	40,6	0,4



EDP	DC	LU	LCF	OAL	DCON	LS	PL

Drilling | Solid carbide

Micro drills

# ADO-MICRO-15D NEW

Drilling | Solid carbide | Micro drills



- First choice in quality and performance
- Micro carbide drill with internal coolant, IchAda coating
- Double margin, up to 15xD
- For general purpose steels and cast iron

<b>P</b>	<b>P</b>	<b>P</b>	<b>P</b>	<b>M</b>	<b>K</b>	<b>K</b>	<b>N</b>	<b>S</b>	<b>H</b>	<b>H</b>	<b>H</b>
$C < 0,2\%$	$0,25 < C < 0,4$	$C \geq 0,45\%$	SCM	INOX	GG	GGG	AC, ADC	Ti	25-35 HRC	35-45 HRC	45-52 HRC

<b>A</b>	CARBIDE	IchAda	$\pm 30^\circ$	$0 \sim -0,009$	SHRINK FIT		$135^\circ$
----------	---------	--------	----------------	-----------------	---------------	--	-------------

EDP	DC	LU	LCF	OAL	DCON	LS	PL
48337120	2	30	40	77	3	34,6	0,4



EDP	DC	LU	LCF	OAL	DCON	LS	PL





# ADO-MICRO-20D NEW

Drilling | Solid carbide | Micro drills



- First choice in quality and performance
- Micro carbide drill with internal coolant, IchAda coating
- Double margin, up to 20xD
- For general purpose steels and cast iron

--	--	--	--	--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

EDP	DC	LU	LCF	OAL	DCON	LS	PL
8732046	1	20	24	68	3	39,8	0,2
8732047	1,1	22	26,4	75	3	44,6	0,2
8732048	1,2	24	28,8	75	3	42,3	0,2
8732049	1,3	26	31,2	75	3	40,1	0,3
8732050	1,4	28	33,6	81	3	43,9	0,3
8732051	1,5	30	36	81	3	41,7	0,3
8732052	1,6	32	38,4	81	3	39,5	0,3
8732053	1,7	34	40,8	88	3	44,3	0,4
8732054	1,8	36	43,2	88	3	42,1	0,4
8732055	1,9	38	45,6	88	3	39,8	0,4
8732056	2	40	48	95	3	44,6	0,4

EDP	DC	LU	LCF	OAL	DCON	LS	PL



Drilling | Solid carbide

Micro drills



# ADO-MICRO-25D NEW

Drilling | Solid carbide | Micro drills



- First choice in quality and performance
- Micro carbide drill with internal coolant, IchAda coating
- Double margin, up to 25xD
- For general purpose steels and cast iron



EDP	DC	LU	LCF	OAL	DCON	LS	PL	EDP	DC	LU	LCF	OAL	DCON	LS	PL
48337320	2	50	58	105	3	44,6	0,4								

Drilling | Solid carbide




Micro drills



## Stable Performance

### Stable performance even in deep-hole applications

The double margin enhances the straightness stability of drill to enable stable drilling performance > Also reduces the rifle marks on the inner surface of hole

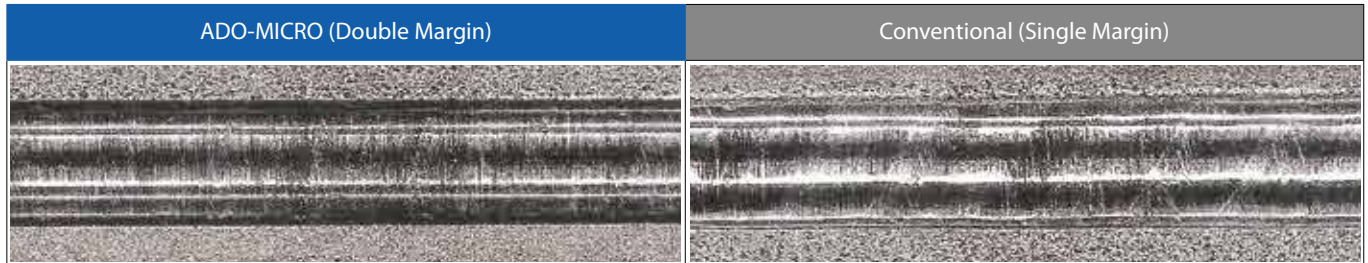


Tool: ADO-MICRO 20D Ø 2 Work Material: SUS304 Depth of Hole: 40mm

## High Efficiency

### Approximately 9 times the drilling efficiency by non-step drilling

Non-step drilling is possible even for deep holes, enabling high efficiency processing


Tool	ADO-MICRO 12D Ø 15	Conventional
Work Material	SUS304	
Machining	Non-step drilling	Step drilling (0,5mm step)
Cutting Speed	50m/min (10.610min <sup>-1</sup> )	28m/min (5.940min <sup>-1</sup> )
Feed	318mm (0,03mm/rev)	89mm (0,015mm/rev)
Depth of Hole	12mm (Blind) with pilot hole	
Coolant	Water-Soluble (Internal)	Water-Soluble (External)
Machine	Vertical machining center (HSK-A40)	

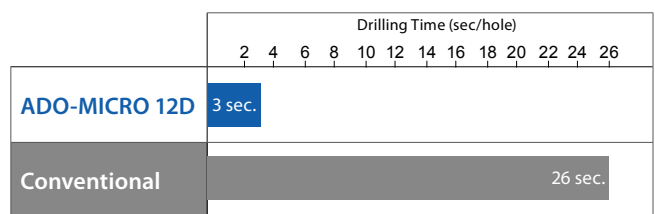

## Coating

### IchAda coating with excellent surface smoothness

The excellent smoothness in conjunction with high abrasion resistance and heat resistance enable small diameter tools to achieve long tool life

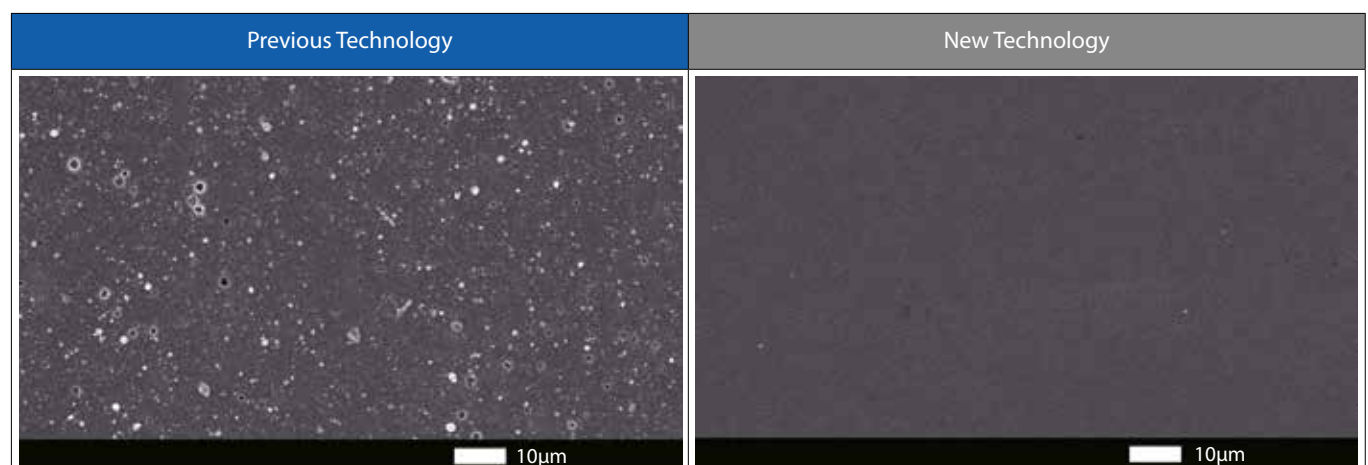


IchAda is a registered trademark of OSG Corporation.

## Long tool life achieved by stable drilling

### Benefit of unique flute geometry




<b>Tool</b>	<b>ADO-MICRO 20D Ø 2</b>
<b>Work Material</b>	SCM440
<b>Cutting Speed</b>	50m/min (7.960min <sup>-1</sup> )
<b>Feed</b>	557mm/min (0,07mm/rev)
<b>Depth of Hole</b>	38mm (Blind) with pilot hole
<b>Coolant</b>	Water-Soluble (Internal)
<b>Coolant Pressure</b>	3Mpa
<b>Machine</b>	Vertical machining center (HSK-A40)

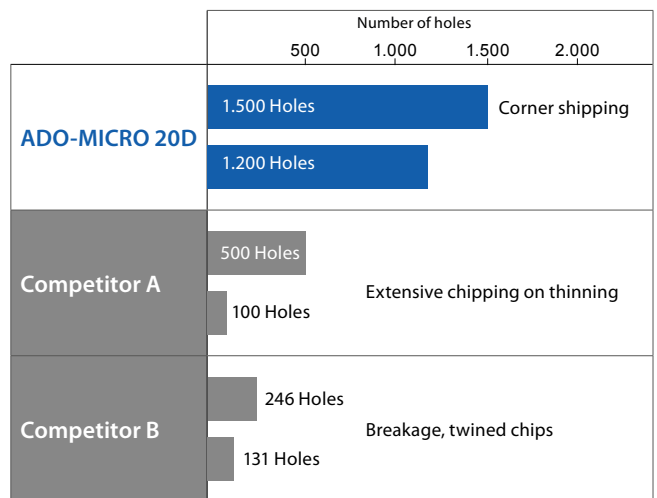

## Large coolant flow volume to enable stable drilling


### Benefit of enlarged oil holes

<b>Tool</b>	<b>ADO-MICRO 5D Ø 0,7</b>
<b>Work Material</b>	SUS304
<b>Cutting Speed</b>	30m/min (13.640min <sup>-1</sup> )
<b>Feed</b>	136mm/min (0,01mm/rev)
<b>Depth of Hole</b>	3,5mm (Blind)
<b>Coolant</b>	Water-Soluble (Internal)
<b>Coolant Pressure</b>	5Mpa
<b>Machine</b>	Vertical machining center (HSK-A63)

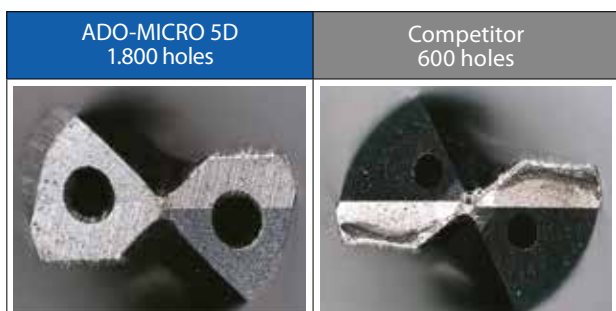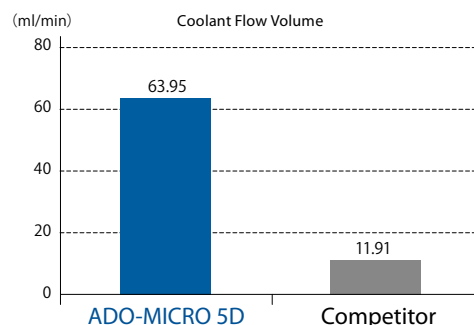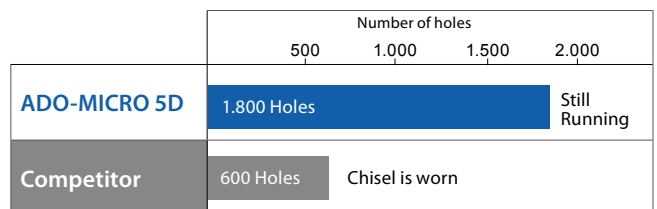

## Efficiency improvement in the machining of titanium alloy bolts


Tool	ADO-MICRO 20D Ø 1,2	Competitor Ø 1,2
Work Material	Ti-Al-4V	
Machining	Non-step drilling	Step drilling (0,12mm step)
Cutting Speed	35m/min (9.300min <sup>-1</sup> )	10m/min (2.600min <sup>-1</sup> )
Feed	167mm/min (0,02mm/rev)	30mm/min (0,01mm/rev)
Depth of Hole	15mm (Blind) with pilot hole	
Coolant	Water-Soluble (Internal)	
Coolant Pressure	2Mpa	
Machine	Vertical machining center (BT30)	

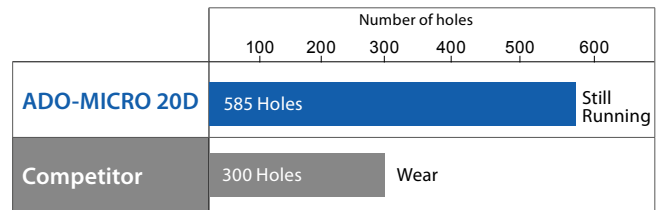

## Excellent durability achieved by combining "automatic lathe + oil-based coolant"

Tool	ADO-MICRO 30D Ø 1,6
Work Material	SUS440C
Cutting Speed	20m/min (4.000min <sup>-1</sup> )
Feed	120mm/min (0,03mm/rev)
Depth of Hole	45mm (Blind) with pilot hole
Coolant	Oil-based coolant (Internal)
Coolant Pressure	7Mpa
Machine	CNC Automatic lathe


Wear condition of cutting edge after drilling 1.200 holes

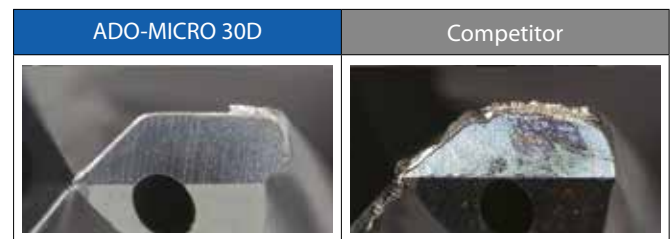

## Cutting edge condition in special steel drilling application

Tool	ADO-MICRO 12D Ø 1,5
Work Material	SUJ2
Cutting Speed	45m/min (9.550min <sup>-1</sup> )
Feed	430mm/min (0,045mm/rev)
Depth of Hole	9mm (Blind) with pilot hole
Coolant	Water-Soluble (Internal)
Coolant Pressure	1,5Mpa
Machine	Vertical machining center (HSK-A40)

Cutting edge wear condition after drilling 900 holes

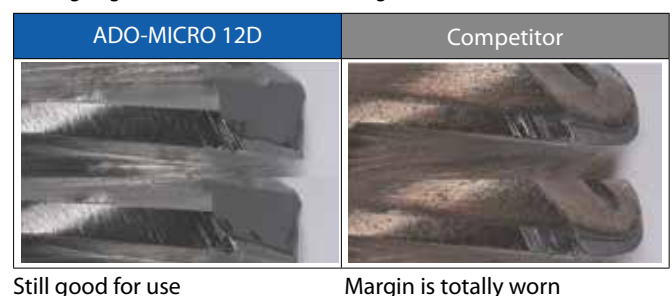

Still good for use

Margin is totally worn


# CUTTING CONDITIONS

Drilling | Solid | Cutting conditions

## ADO-MICRO 2D/5D

Vc	Mild Steel - Low Carbon Steel SS400 - S10C ~150HB ~500 N/mm <sup>2</sup>		Carbon Steel S35C - S50C ~210HB ~710 N/mm <sup>2</sup>		Alloy Steel SCM - SCr - sncm 710 ~900 N/mm <sup>2</sup>		Alloy Steel SCM - SCr - sncm 710 ~900 N/mm <sup>2</sup>		Austenitic Stainless Steel SUS303 - SUS304 SUS316 - SUS316L		Special Alloy Steel SUJ2 - SUS440	
	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)
20~40~60m/min			20~40~60m/min			20~40~60m/min			20~30~40m/min			25~35~45m/min
0,7	18.200	0,007 ~ 0,021	18.200	0,007 ~ 0,021	18.200	0,014 ~ 0,028	13.600	0,014 ~ 0,028	13.600	0,007 ~ 0,021	15.900	0,007 ~ 0,021
1	12.700	0,01 ~ 0,03	12.700	0,01 ~ 0,03	12.700	0,02 ~ 0,04	9.500	0,02 ~ 0,04	9.500	0,01 ~ 0,03	11.100	0,01 ~ 0,03
1,5	8.500	0,015 ~ 0,045	8.500	0,015 ~ 0,045	8.500	0,03 ~ 0,06	6.400	0,03 ~ 0,06	6.400	0,015 ~ 0,045	7.400	0,015 ~ 0,045
2	6.400	0,02 ~ 0,06	6.400	0,02 ~ 0,06	6.400	0,04 ~ 0,08	4.800	0,04 ~ 0,08	4.800	0,02 ~ 0,06	5.600	0,02 ~ 0,06

Vc	Cast Iron FC250 ~350N/mm <sup>2</sup>		Ductile Cast Iron FCD450 - FCD600 400 ~600 N/mm <sup>2</sup>		Aluminium Alloy AC4C - ADC		Aluminium A5052 - A7075		Titanium Alloy		Heat Resistant Alloy Inconel 718	
	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)
20~50~60m/min			30~40~50m/min			30~50~70m/min			20~40~60m/min			40~50~60m/min
0,7	22.700	0,014 ~ 0,028	18.200	0,014 ~ 0,028	22.700	0,014 ~ 0,042	18.200	0,007 ~ 0,021	22.700	0,011 ~ 0,018	4.500	0,004 ~ 0,014
1	15.900	0,02 ~ 0,04	12.700	0,02 ~ 0,04	15.900	0,02 ~ 0,06	12.700	0,01 ~ 0,03	15.900	0,015 ~ 0,025	3.200	0,005 ~ 0,02
1,5	10.600	0,03 ~ 0,06	8.500	0,03 ~ 0,06	10.600	0,03 ~ 0,09	8.500	0,015 ~ 0,045	10.600	0,023 ~ 0,038	2.100	0,008 ~ 0,03
2	8.000	0,04 ~ 0,08	6.400	0,04 ~ 0,08	8.000	0,04 ~ 0,12	6.400	0,02 ~ 0,06	8.000	0,03 ~ 0,05	1.600	0,01 ~ 0,04




1. This cutting condition chart is based on the usage of **water-soluble coolant and internal oil supply**.
2. Please use quality water-soluble coolant with a dilution factor of approximately 20 times.
3. Please use a precision filter (approximation of 3µm to 5µm) to prevent the oil holes from clogging.
4. Although the recommended coolant pressure is 3 MPa or more, please adjust accordingly if the level of flow volume is unsatisfactory due to the type and concentration of cutting oil used.
5. For accurate mounting, acceptable deflection of the body cylindrical part at the shank end should be **less than 0.002µm**, as shown in the illustrated figure.
6. For work material with poor chip evacuation characteristic, please perform step drilling as required.
7. Please always use the appropriate cutting fluid recommended by the cutting fluid manufacturer in the machining of magnesium alloys. Be cautious with the cutting chips as they are highly flammable and may pose a serious fire risk if not properly handled.

## ADO-MICRO 12D/15D/20D/25D/30D

Vc	Mild Steel - Low Carbon Steel SS400 - S10C ~150HB ~500 N/mm <sup>2</sup>		Carbon Steel S35C - S50C ~210HB ~710 N/mm <sup>2</sup>		Alloy Steel SCM - SCr - sncm 710 ~900 N/mm <sup>2</sup>		Alloy Steel SCM - SCr - sncm 710 ~900 N/mm <sup>2</sup>		Austenitic Stainless Steel SUS303 - SUS304 SUS316 - SUS316L		Special Alloy Steel SUJ2 - SUS440	
	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)
20~40~60m/min			20~40~60m/min			20~40~60m/min			20~30~40m/min			25~35~45m/min
1	12.700	0,01 ~ 0,03	12.700	0,01 ~ 0,03	12.700	0,02 ~ 0,04	9.500	0,02 ~ 0,04	9.500	0,01 ~ 0,03	11.100	0,01 ~ 0,03
1,5	8.500	0,015 ~ 0,045	8.500	0,015 ~ 0,045	8.500	0,03 ~ 0,06	6.400	0,03 ~ 0,06	6.400	0,015 ~ 0,045	7.400	0,015 ~ 0,045
2	6.400	0,02 ~ 0,06	6.400	0,02 ~ 0,06	6.400	0,04 ~ 0,08	4.800	0,04 ~ 0,08	4.800	0,02 ~ 0,06	5.600	0,02 ~ 0,06

Vc	Cast Iron FC250 ~350N/mm <sup>2</sup>		Ductile Cast Iron FCD450 - FCD600 400 ~600 N/mm <sup>2</sup>		Aluminium Alloy AC4C - ADC		Aluminium A5052 - A7075		Titanium Alloy		Heat Resistant Alloy Inconel 718	
	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)	S (min <sup>-1</sup> )	F (mm/rev.)
20~50~60m/min			30~40~50m/min			30~50~70m/min			20~40~60m/min			40~50~60m/min
1	15.900	0,02 ~ 0,04	12.700	0,02 ~ 0,04	15.900	0,02 ~ 0,06	12.700	0,01 ~ 0,03	15.900	0,015 ~ 0,025	3.200	0,005 ~ 0,02
1,5	10.600	0,03 ~ 0,06	8.500	0,03 ~ 0,06	10.600	0,03 ~ 0,09	8.500	0,015 ~ 0,045	10.600	0,023 ~ 0,038	2.100	0,008 ~ 0,03
2	8.000	0,04 ~ 0,08	6.400	0,04 ~ 0,08	8.000	0,04 ~ 0,12	6.400	0,02 ~ 0,06	8.000	0,03 ~ 0,05	1.600	0,01 ~ 0,04



1. This cutting condition chart is based on the usage of **water-soluble coolant and internal oil supply**.
2. Please use quality water-soluble coolant with a dilution factor of approximately 20 times.
3. Please use a precision filter (approximation of 3µm to 5µm) to prevent the oil holes from clogging.
4. Although the recommended coolant pressure is 3 MPa or more, please adjust accordingly if the level of flow volume is unsatisfactory due to the type and concentration of cutting oil used.
5. For accurate mounting, acceptable deflection of the body cylindrical part at the shank end should be **less than 0.002µm**, as shown in the illustrated figure.
6. For work material with poor chip evacuation characteristic, please perform step drilling as required.
7. From 12D type included, please use a 2D type drill to prepare a pilot hole prior to processing.
8. Please always use the appropriate cutting fluid recommended by the cutting fluid manufacturer in the machining of magnesium alloys. Be cautious with the cutting chips as they are highly flammable and may pose a serious fire risk if not properly handled.

## Recommended drilling method for deep-holes


### ① ADO-MICRO 2D

Make a pilot hole with the ADO-MICRO 2D.


ADO-MICRO 12D/20D/30D

ADO-MICRO 2D (140°)


The ADO-MICRO 2D (140° point angle) is the recommended pilot hole drills of the ADO-MICRO 12D/20D/30D.

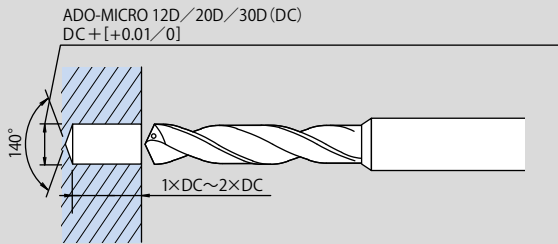


★ When working on a curved surface, use the FX-ZDS (end mill for counterboring) or the ADF (carbide flat drill) to counterbore a flat surface before drilling a pilot hole.

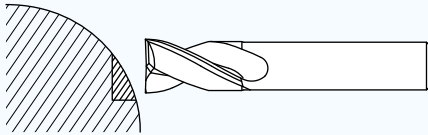


② Insert the long drill into a pilot hole with a low revolution of 500 to 1,000 min<sup>-1</sup> (n).

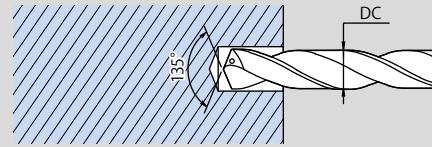

③ Increase the revolution to the designated speed and start drilling.

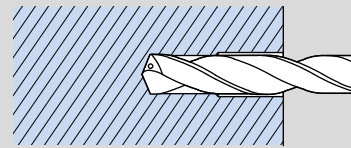

④ After drilling, move the drill away from the bottom of the hole; then reduce its speed to 500 to 1,000 min<sup>-1</sup> (n) while pulling it out of the hole.

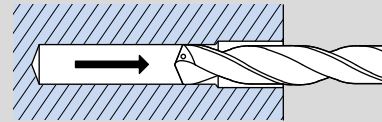

※ Make sure to use internal coolant supply when drilling.

## For drilling applications exceeding Ø2

Carbide Drill Series

AD•ADO



Carbide Drill Series for Stainless Steel and Titanium Alloy

ADO-SUS





## SWEDEN

Branch office of OSG SCANDINAVIA  
Singelgatan 7  
212 28 Malmö  
Sweden  
Tel: +46 40 41 22 55  
osg@osg-scandinavia.com

## OSG SCANDINAVIA

(For Scandinavian countries)  
Langebjergvaenget 16  
4000 Roskilde  
Denmark  
Tel: +45 46 75 65 55  
osg@osg-scandinavia.com

## OSG NETHERLANDS

Bedrijfsweg 5  
3481 MG Harmelen  
The Netherlands  
Tel: +31 348 44 2764  
Fax: +31 348 44 2144  
info@osg-nl.com

## OSG UK

Kelsey Close, Attleborough Fields Ind Est,  
CV11 6RS, Nuneaton  
United Kingdom  
Tel: +44 1827 720 013  
sales@osg-uk.com

## OSG EUROPE LOGISTICS

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord  
Belgium  
Tel: +32 10 23 05 07  
Fax: +32 10 23 05 51  
info@osgeurope.com

## OSG BELUX

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord  
Belgium  
Tel: +32 10 23 05 11  
Fax: +32 10 23 05 31  
info@osg-belgium.com

## OSG IBÉRICA


Bekolarra 4  
E - 01010 Vitoria-Gasteiz  
Spain  
Tel: +34 945 242 400  
Fax: +34 945 228 883  
osg.iberica@osg-ib.com

## OSG FRANCE

Parc Icade, Paris Nord 2  
Immeuble "Le Rimbaud"  
22 Avenue des Nations  
CS66191 - 93420 Villepinte  
France  
Tel: +33 1 49 90 10 10  
Fax: +33 1 49 90 10 15  
sales@osg-france.com

## OSG ITALY

Via Ferrero, 65 A/B  
I - 10098 Rivoli  
Italy  
Tel: +39 0117705211  
Fax: +39 0117705215  
info@osg-italia.it

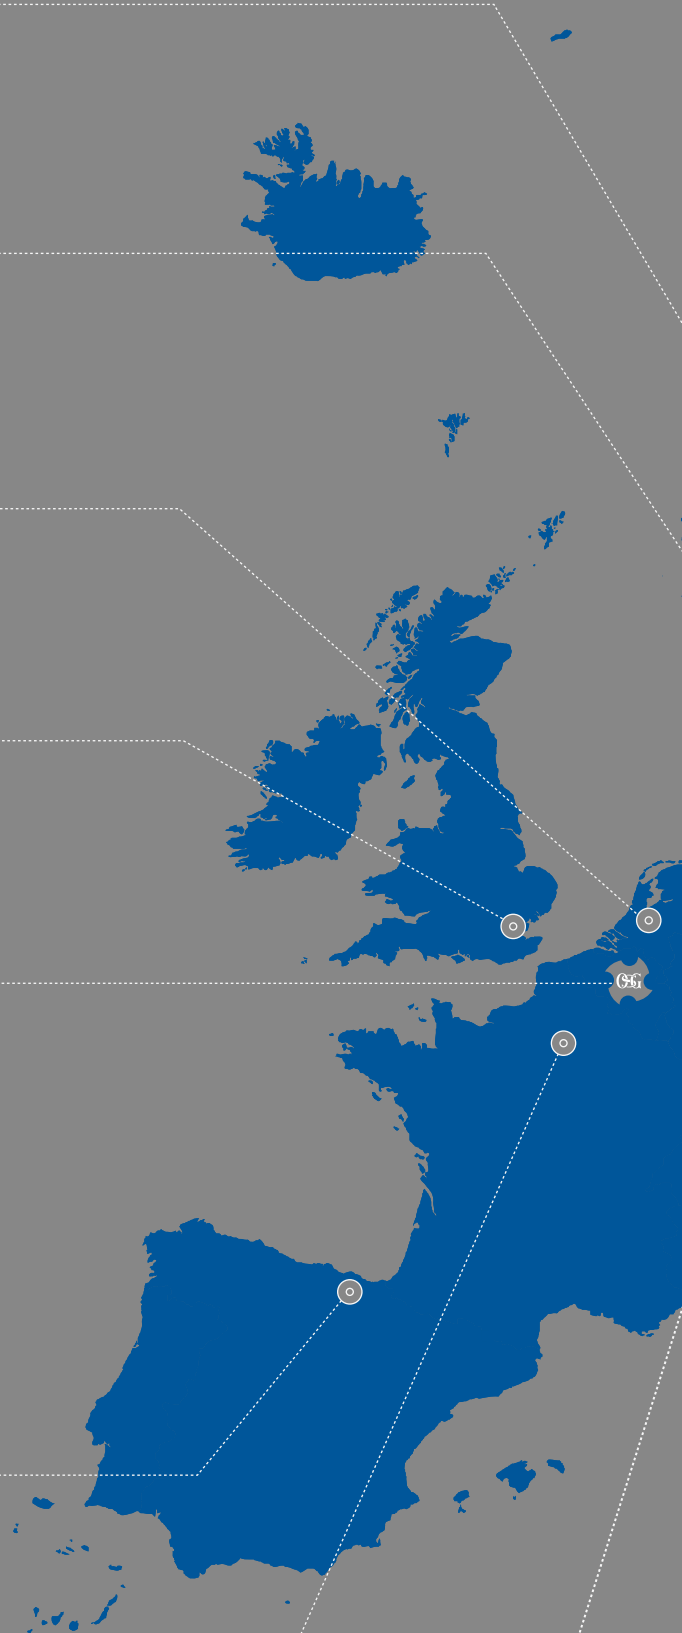



**CZECH REPUBLIC, SLOVAKIA, HUNGARY**

OSG Europe Logistics S. A.  
Slovakia, organizačná zložka  
Račianska 22/A, Bratislava 831 02  
Slovakia  
Tel.: +421 24 32 91 295  
info@osgeurope.com

**OSG POLAND**

ul. Spółdzielcza 57  
05-074 Halinów  
Polska  
Tel: +22 760 82 71  
Mob. +48 570 677 711  
osg@osg-poland.com

**OSG RUSSIA**

Butlerova street, 17B, office 5069  
117342 Moscow  
Russia  
Tel: +7 (495) 150 41 54  
info@osg-russia.com

**ROMSAN INTERNATIONAL CO. SRL**

Reprezentant Exclusiv OSG  
25C, Bucuresti-Magurele Street  
051431 Bucuresti  
România  
Tel: +40 21 322 07 47  
Fax: +40 21 321 56 00  
romsan.int@romsan.ro

**OSG TURKEY**

Rami Kişla Cad.No:56 Eyüp  
Istanbul 34056  
Turkey  
Tel: +90 212 565 24 00  
Fax: +90 212 565 44 00  
info@osg-turkey.com

**Vischer & Bolli AG**

Machining and Workholding  
Im Schossacher 17  
CH-8600 Dübendorf  
Schweiz  
Tel.: +41 44 802 15 15  
Fax: +41 44 802 15 95  
info@vb-tools.com

**OSG GERMANY**

Karl-Ehmann-Str. 25  
D - 73037 Göppingen  
Germany  
Tel: +49 7161 6064 - 0  
Fax: +49 7161 6064 - 444  
info@osg-germany.de



shaping your dreams

#### **OSG EUROPE LOGISTICS**

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord - Belgium  
Tel: +32 10 23 05 07  
Fax: +32 10 23 05 51  
info@osgeurope.com

#### **OSG BELUX**

Avenue Lavoisier 1  
B-1300 Z.I. Wavre - Nord - Belgium  
Tel: +32 10 23 05 11  
Fax: +32 10 23 05 31  
info@osg-belgium.com

#### **OSG FRANCE**

Parc Icade, Paris Nord 2  
Immeuble "Le Rimbaud"  
22 Avenue des Nations  
CS66191 - 93420 Villepinte - France  
Tel: +33 1 49 90 10 10  
Fax: +33 1 49 90 10 15  
sales@osg-france.com

#### **OSG NETHERLANDS**

Bedrijfsweg 5 - 3481 MG Harmelen  
Tel: +31 348 44 2764  
Fax: +31 348 44 2144  
info@osg-nl.com

#### **OSG UK**

Kelsey Close, Attleborough Fields Ind Est,  
CV11 6RS, Nuneaton, United Kingdom.  
Tel: +44 1827 720 013  
uk\_sales@osg-uk.com

#### **CZECH, SLOVAKIA, HUNGARY**

OSG Europe Logistics S.A.  
Slovakia organizacna zlozka  
Racianská 22/A, SK-83102 Bratislava  
Slovakia  
Tel. +421 24 32 91 295  
Orders-osgsvk@osgeurope.com

#### **OSG POLAND Sp. z.o.o.**

Spółdzielcza 57  
05-074 Halinów - Poland  
Tel: +22 760 82 71  
Fax: +22 760 82 71  
osg@osg-poland.com

#### **OSG GERMANY**

Karl-Ehmann-Str. 25  
D - 73037 Göppingen - Germany  
Tel: +49 7161 6064 - 0  
Fax: +49 7161 6064 - 444  
info@osg-germany.de

#### **OSG SCANDINAVIA**

(For Scandinavian countries)  
Langebjergvaenget 16  
4000 Roskilde - Denmark  
Tel: +45 46 75 65 55  
Fax: +45 46 75 67 00  
osg@osg-scandinavia.com

#### **SWEDEN**

Branch office of OSG SCANDINAVIA  
Singelgatan 7  
212 28 Malmö - Sweden  
Tel: +46 40 41 22 55  
osg@osg-scandinavia.com

#### **OSG IBERICA**

Bekolarra 4  
E - 01010 Vitoria-Gasteiz - Spain  
Tel: +34 945 242 400  
Fax: +34 945 228 883  
osg.iberica@osg-ib.com

#### **RUSSIA**

Butlerova street, 17B, office 5069  
117342 Moscow - Russia  
Tel: +7 (495) 150 41 54  
info@osg-russia.com

#### **OSG TURKEY**

Rami Kişla Cad.No:56 Eyüp  
Istanbul 34056 - Turkey  
Tel:+90 212 565 24 00  
Fax: +90 212 565 44 00  
info@osg-turkey.com

#### **ROMSAN INTERNATIONAL CO. SRL**

Reprezentant Exclusiv OSG  
25C, Bucuresti-Magurele Street  
051431 Bucuresti - România  
Tel: +40 21 322 07 47  
Fax: +40 21 321 56 00  
romsan.int@romsan.ro

#### **AUSTRIA**

Branch office of OSG GERMANY  
Messestraße 11  
A-6850 Dornbirn  
Tel: +49 7161 6064-0  
Fax: +49 7161 6064-444  
info@osg-germany.de

#### **OSG ITALIA**

Via Ferrero, 65 A/B3  
I - 10098 Rivoli - Italy  
Tel: +39 0117705211  
Fax: +39 0117705215  
info@osg-italia.it

#### **Vischer & Bolli AG**

Machining and Workholding  
Im Schossacher 17  
CH-8600 Dübendorf  
T +41 44 802 15 15  
F +41 44 802 15 95  
info@vb-tools.com

#### **OSG EUROPE LOGISTICS S.A.**

01/2022 - All rights reserved. © OSG Europe 2022

The contents of this catalogue are provided to you for viewing only. They are not intended for reproduction either in part or in whole in this or other medium. They cannot be copied, used to create derivation work or used for any reason, by means without the express, written permission of the copyright owner. If prices are stated, they are netto unit-prices and any eventual tax(es) have to be added. The company is not responsible for any printing error in technical, price and/or any other data.

Tool specifications subject to change without notice.

[www.osgeurope.com](http://www.osgeurope.com)